

MRL Middle Size Team: Robocup2019 Team Description Paper

B. Karasfi ¹

H.RasamFard, B.Mostafavi, A.Abbasian, A.Saboohi, A.H.Najafdari

Mechatronics Research Laboratory, Islamic Azad University of Qazvin - IRAN

¹karasfi@gmail.com

Abstract. The purpose of this article is to describe the new features and implementation of middle-size league robot team “MRL” for Robocup 2019 with the improvements made since the previous years. The anticipated outcome of changes is mainly considered here to indicate the progress of designing a new Robot structure and also developing new features in AI software functionality according to previous results of completions.

1 Introduction

The middle size team of MRL formerly Mechatronics Research Laboratory has begun researching at Mechatronic Azad University of Qazvin since Aug 2003. The major purpose of this community is starting theoretically and experimental issues to create multi agent systems in dynamic uncertain environment. MRL has begun the research and work in MSL since 2004. The first official participations were at Robocup 2005 competitions in Osaka and Robocup 2006 in Bremen. Based on achieved knowledge we indented to optimize hardware, control and software system for Robocup 2008 and designed robust system for Robocup 2009 in Graz, as a result, luckily we find ourselves between four top teams of world Cup. In Robocup Singapore 2010 competitions we achieved the first place of technical challenge and fourth place of league competitions respectively. Also, we got second place of free challenge and fifth place of league in Robocup Turkey 2011 competitions. After a year of hard work, we managed to get the second place of league in Robocup Mexico City 2012 competitions. Luckily another achievement of the team was getting the 1st place of league in Robocup Asia Pacific 2018. We believe that, the Intelligent, cooperative and adaptive behavior of the robots are the most important factors for a team success. With this regard our research is continuously focused on: reliability, sensor fusion, dealing with uncertainty of environment for the robots, world modeling and dealing with missing information. In the following sections we briefly explain current status and new achievements of our team.

2 Hardware and mechanic

The first participation of team MRL in RoboCup Middle Size Soccer league was in RoboCup 2005. Since that time, there were 4 generation of platforms in which some mechanisms and parts have been changed. In new design procedure, some of the problems have been detected and solved which is explained respectively.

2.1 New mechanical features

We designed a flexible and powerful 3-wheel omnidirectional robot which is shown in figure 1. The design major features are smaller dimensions, less shaking and less weight.



Fig 1. MRL 3wheel robot

Items	Description
Platform	3 wheel Omnidirectional
Max Speed	4 m/s
Max acceleration	3.5 m/s
Kicker	Electromagnetic
Laptop	Lenovo X200
Camera	UEye UI-2210-C
Image Processing	Omni directional mirror
Other sensor	IMU & IR
Wheel	Rotacaster A+
Spin back	Active 60watt 24V DC motor
Weight	36 K/g

Table 1. Hardware specification of the robot

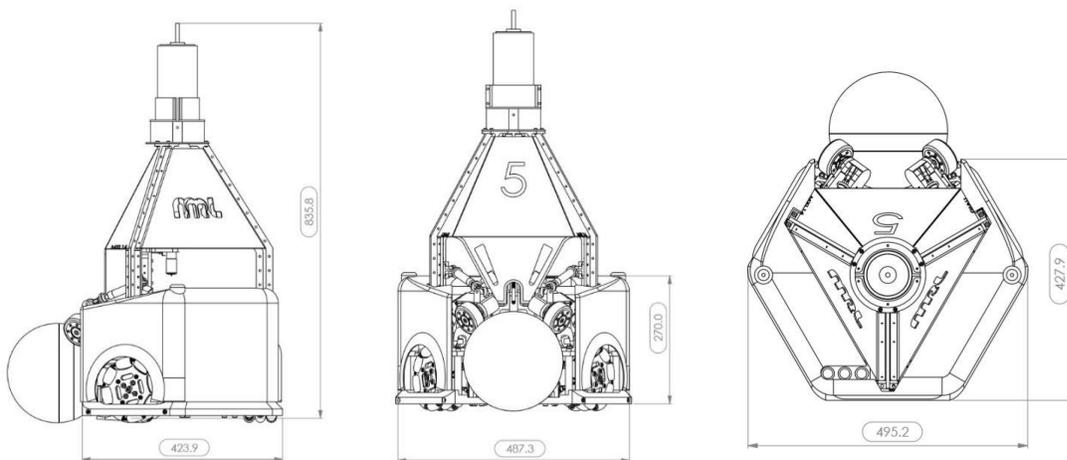


Fig 2. MRL 3-wheels robot dimensions

2.1.1 General information

The 2019 MRL Robot has undergone many changes compared to its predecessors. One of the most obvious changes is the robust weight loss of the robot and the change of four-wheel robot into three-wheel one which overall caused

the robot to be faster and more agile than the previous versions of the four wheel robots. You'll read more about the functional details of this robot.

2.1.2 New wheels

One of the challenges of mechanics is decreasing the vibrations due to motions. Hopefully we could almost tackle this issue via using new design of wheels.

each wheel contains 24 polyurethane small wheels which is anti-friction. The structure is divided in 3 sections that every small wheels are located in 15 degrees away from others which means at any situation 2 wheels has friction to the field and finally reducing the wasted potential of acceleration.


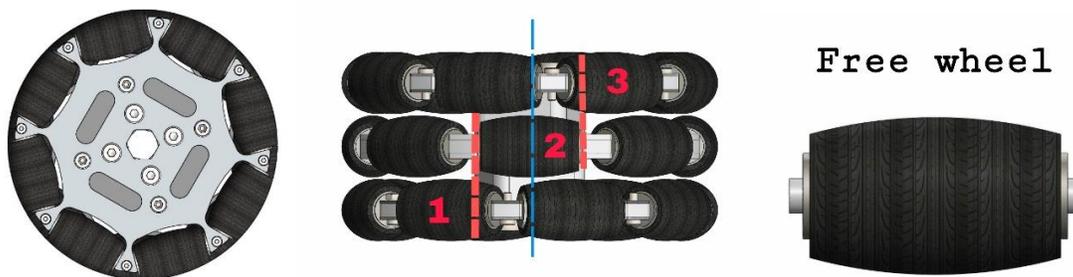


Fig.3.locomotion mechanism

2.1.3 Robot head (Vision)

The head of robots contains a camera which is the most sensitive part. Cause of having trouble in balancing the camera along field we decided to apply a ball bearings and 4 customizable screws to handle it which means finally we would have lower noise and break down.

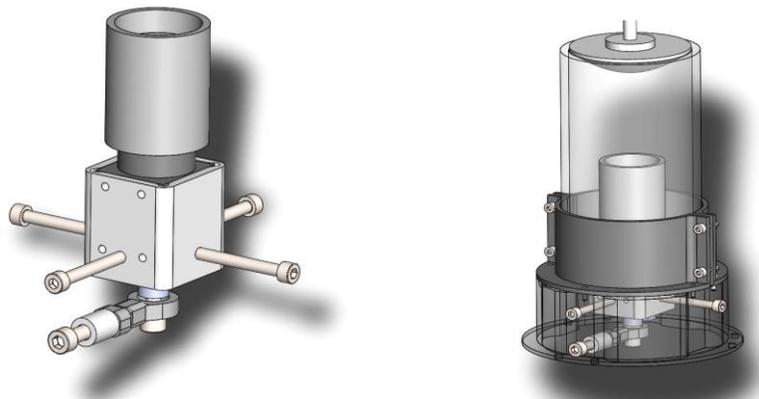

2.1.4 Ball handler mechanism

As mentioned before, ball handler system needs more power in order to win the fights. In the previous design, worm gear reduction has been used to provide required torque for the wheels. But the truth is that only half of the power is available for the wheels and the rest is wasted due to the worm gear wear and its low efficiency. So, changing the reduction mechanism could be a perfect solution for this problem. In the new design, ball handler mechanism through a 3 stage spur gear box provides 40-watt output power which is nearly double of the previous mechanism.

2.2 New electrical design

A new approach to design of new electrical system of MRL such as boards and the way of wiring in order to achieve the ease of accessibility of them with least complexity, is considered. So the close coordination among this part and the mechanic is obvious.

In the following sections we briefly explain new changes.

2.2.1 Improving packets processing method

Controlling the robots well has a large impact on their performance. Good performance is achieved only when high-level commands are sent to the motors and other mechanical parts in a timely manner and without delay. This is mostly done by the hardware. In order to have better performance in regard to controlling the robots, a suitable low-level scheduling has been created for processing packets received from the software.


The conversion of high-level data (LAN) to low-level data (CAN) is done by the LTC board. Scheduling is of the utmost importance in this board. If a packet is received before the previous packet is fully processed, it might be lost.

A process time of less than 2ms has been achieved. This is suitable for sending packets from the high-level section, and it will lead to improvements in controlling the robots.

Send Packet Every 5ms



Process Time < 2ms

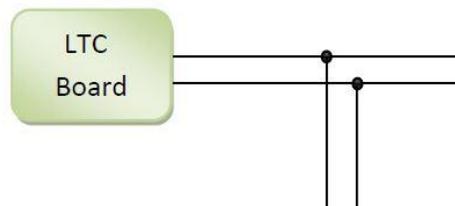


2.2.2 Kicker Board

The kicker mechanism operates by discharging a capacitor bank into a solenoid. The capacitor bank is charged by a high-voltage 300 KHz boost circuit which is switched by a MOSFET. This high voltage leads to noise. Therefore, a new kicker board has been designed that does not require a separate processor, and is fully isolated. The power supply used in this board is separate from the rest of the electronic components in the robot. In the new kicker board, the microcontroller has been removed. Commands are sent from the microcontroller on the mainboard to the kicker board in an isolated fashion. The MOSFET is switched by a MAX1771 IC. This IC generates PWM pulses with voltage and current feedbacks. These two feedbacks allow for high accuracy in keeping the output voltage stable.

The lack of a separate microcontroller is also one of the advantages of the new kicker board, as it leads to easier debugging and smaller board size.

A controlling mechanism for setting kick height has been added to the electronics. Using an encoder coupled to a gearbox-equipped DC motor, and a PI controlling system, it has been made possible to set the height of the kicker and its point of impact with the ball. This has led to increased accuracy in ground passes, aerial shots, and higher quality chip shots.

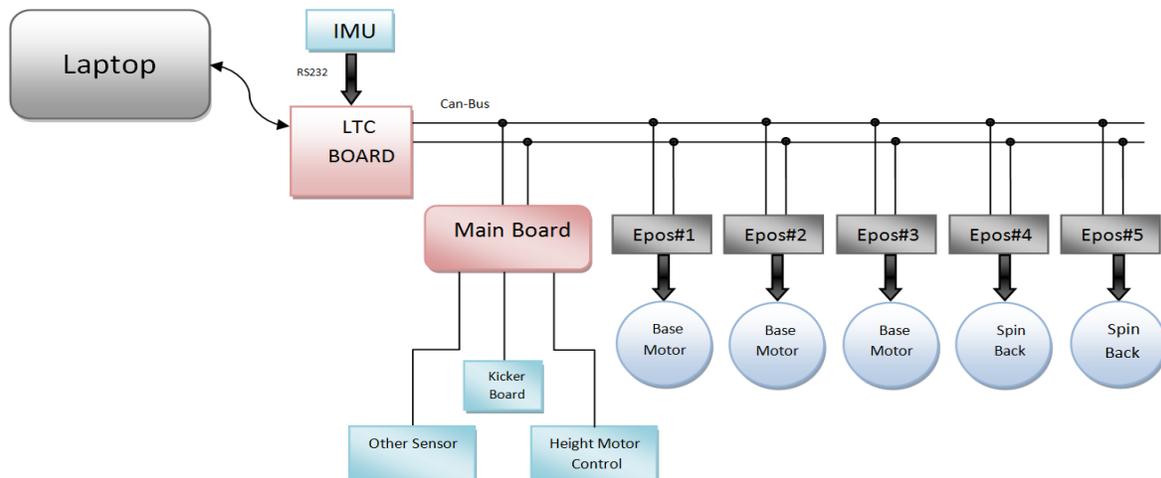

3 Software

In our software architecture, we implemented some of the intelligent behavior algorithms including passing skill based on reinforcement learning, path planning based on Voronoi diagram and Bezier curves, ball position estimation, obstacle tracking, dribbling and fusion of information in coach box. Also navigating the robot movement to the target is also assigned to this section because of the future development of this part.

This section includes three main units: planning unit, executing unit and knowledge unit. The major task of knowledge unit is collecting sensory and vision output data, analyzing and converting them to meaningful data which are inputs of decision making sections.

Planning unit main task is to make high level intelligent decisions (*commands*) like *track ball*, *hold ball* and etc and orchestrates them with other teammate decisions, this part also allotted the general playing strategies of the team according to offensive and defensive states, and then sends the appropriate *commands* to executing unit.

In the *executing unit* the *commands* are analyzes to set of main *skills*, the *skills* are basic *behaviors* like: *Move*, *Stop*, *Rotate*, and *Kick*. These basic moving skills are given to navigation controller.

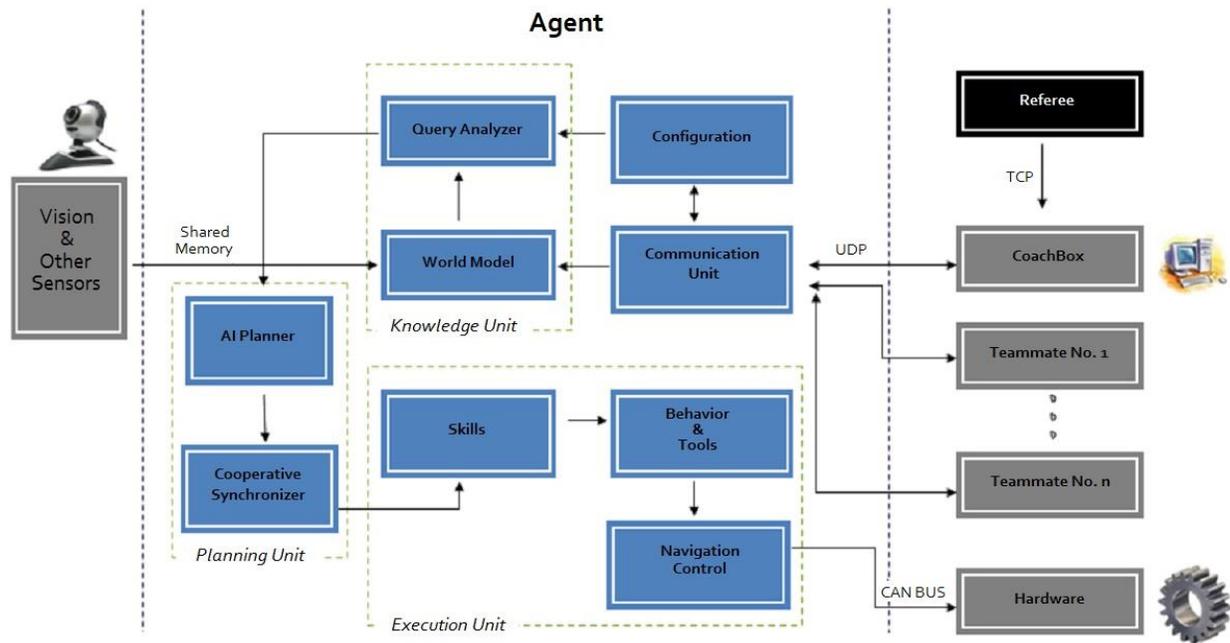


Fig. 4. Software architecture

3.1 New skills

The Introduction and using more skills is a new way that we have done with the volume of the code in this series. Among the benefits of this, can be mentioned as the following:

- Making Fast debug
- Making Low volume of Role's
- Easy access to all skills in the whole program

In the continuation, we will explain some of these skills.

3.1.1 New dribble skill

When we need hand over the ball to our teammate, but we cannot do it, or we cannot open the new way to shoot the ball to the opponent's goal, we can use this Dribble skill.

The main aim of this skill is to use the dribble to opponent and must have the highest degree of security in order to keep the ball to the point of our Interest.

3.1.2 Find best position to receive pass

One of the most important tasks of the attacker when we need to hand over the ball is finding the best place to pass. Now it's absolutely necessary to calculate the most optimal point by the attacker and order to teammate to get correct position.

For each point of playground, a special value determined as a cost, the lowest cost point is selected and announced to teammates.

3.1.3 Deep pass skill

When we need hand over the ball to our teammate and there is no way to make normal pass, we used this skill (It used for long distance passes).

The execution of this skill is as follows:

When we need to pass ball to teammate and there is an opponent between us and our teammate, and the conditions for making a pass ball are met, we specify a point in the vicinity of the rover where it can receive the ball without obstruction from the opponent, the rover start moving to this point before the pass ball is made.

3.2 Using Kinect2

Previously, all the robots were using a single omnidirectional camera as input. Because of this, the robots were unable to detect aerial balls. To solve this limitation, an RGB-D camera (Microsoft Kinect 2) has been added to the goalkeeper robot. By combining the RGB image and depth information received from this device, the exact coordinates of the ball in three-dimensional space can be calculated, allowing the goalkeeper robot to react accordingly when an aerial shot is made by the opponent.

References

1. V.Rostami, S.Ebrahimijam, P.Khajehpoor, P.Mirzaei, M. Yousefiazar "Cooperative Multi Agent Soccer Robot Team," International conference in informatika system science and engineering, Volume 9, November 25-27, 2005, ISBN 975-98458-8-1, page 95-98.
2. J.W. Choi, R.E. Curry, G.H. Elkaim, Real-time obstacle avoiding pathplanning for mobile robots, in: Proceedings of the AIAA Guidance, Navigation and Control Conference, AIAA GNC 2010, Toronto, Ontario, Canada, 2010.
3. Nicolaj C. Stache, Henrik Zimmer, "Robust Circle Fitting in Industrial Vision for Process Control of Laser Welding", Proceedings of the 11th International Student Conference on Electrical Engineering, Prague MAY 2007.
4. J.W. Choi, R.E. Curry, G.H. Elkaim, Real-time obstacle avoiding path planning for mobile robots, in: Proceedings of the AIAA Guidance, Navigation and Control Conference, AIAA GNC 2010, Toronto, Ontario, Canada, 2010.
5. KritChaiso, KanjanapanSukvichai, Skuba Extended Team Description, 2011